


LED Flood Light F Series **imposa**®



LUMILEDS NICHIA

Distribution Curve

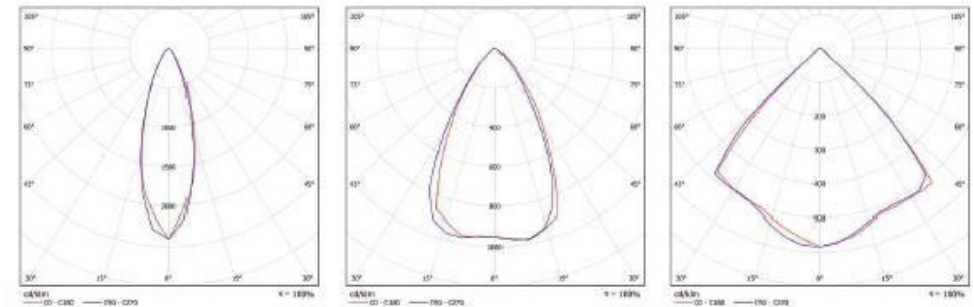

CE RoHS

Life span 40,000h AC 100-240V / 277V RA>75/80 PF>0.9 IP65 Work temperature -40°C~+50°C



Features

1. Modular design. Angle adjustable;
2. Professional optical design ensures good lighting effect;
3. Rational structure design results in less dust accumulation and strong self-cleaning ability.

Model	Power	Lumen	Color Temperature	Dimension
CZ-FL-100FX	100W	12500lm	3000k 4000k 4500k 5000k 5700k 6500k	317*216*125mm
CZ-FL-150FX	150W	18700lm		317*326*125mm
CZ-FL-200FX	200W	25000lm		577*216*125mm
CZ-FL-300FX	300W	37500lm		577*326*125mm
CZ-FL-400FX	400W	50000lm		577*436*125mm
CZ-FL-600FX	600W	75000lm		837*436*125mm

impoSA®